

IMPORTANT NOTICE:

STEM COVER FLASHING MUST BE INSTALLED!!!

Failure to install the stem cover flashing **will result in water penetration**


Proper installation of the Nylon Tether Strap will prevent the stem cover from being separated from the flashing base while the anchor is in use.

Recommended Procedure:

ATTACH STEM COVER TO FLASHING BASES BEFORE USE:

- 1) Secure stem cover to flashing base using the Factory supplied nylon tether strap 15-1/2" length. **DO NOT USE A SHORTER LENGTH TETHER STRAP.**
- 2) Install tether strap as shown below in Fig. 1. Allow no more than 2" of tether strap to extend beyond the locking device.
- 3) To prevent water penetration through the flashing base, the stem cover must be in the **LOCKED POSITION** as shown in Fig. 2.
- 4) Remove the stem cover before you attach a lifeline to the anchor stem. Replace stem cover when the anchor is not use.

Fig. 1

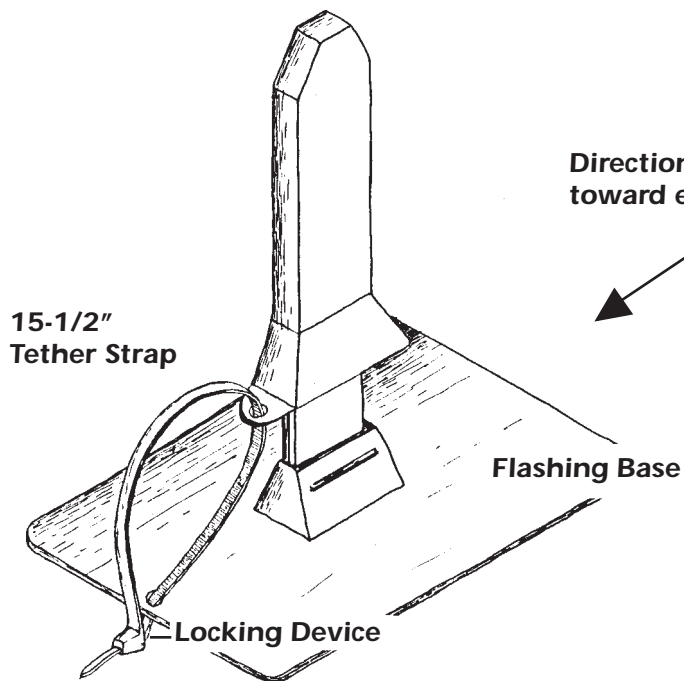

Caution:
Allow no more than
2" of tether strap to
extend beyond locking
device.

Fig. 2

Stem cover shown in
FULLY LOCKED POSITION

